




- [\[Mac\] \[h1\] \[Composer\] \[\]](#)
- [\[Mac\] \[h1\] 2 \[\]](#)
- [\[Mac\] \[Composer\] \[\]](#)

SiteOne Crawler h1

1. [Download](#).
2. [Get MSI](#) [Get EXE](#) crawl [Get SNAP](#).

 **Choose how you want to use the tool**


Desktop Application - graphical interface with an already built-in command-line interface
Command-line Interface - for advanced users who prefer to work with the command line

Desktop Application Command-line Interface


- 1 Download** the latest version of the installer from [releases](#), or here for most common platforms:
 - Windows x64 - **MSI** (recommended) / [EXE](#) / [portable EXE](#)
 - Linux x64 - [ApplImage](#) (recommended) / [DEB](#) / [SNAP](#)
 - macOS arm64 (CPU M1/M2/M3) - [DMG*](#), macOS x64 (CPU Intel) - [DMG*](#)

*** Note for macOS users:** As of 12/12/2023, the macOS app is already signed and **officially notarized by Apple**. We will also strive to publish the next versions to the Mac App Store for easier installation and updates.
- 2 Install** the application and **run** it. You will find it under the name `SiteOne Crawler`.
- 3 Enter the URL** of the website you want to crawl and click the **Run** button.
- 4 Watch video below**, which explains in more detail other useful options.
- 5 Report** a bug or **suggest** an improvement via one of the [channels](#).

3. [Get SNAP](#) [Get EXE](#).
4. [Get MSI](#) [Get EXE](#) crawl [Get SNAP](#) URL [Get SNAP](#).

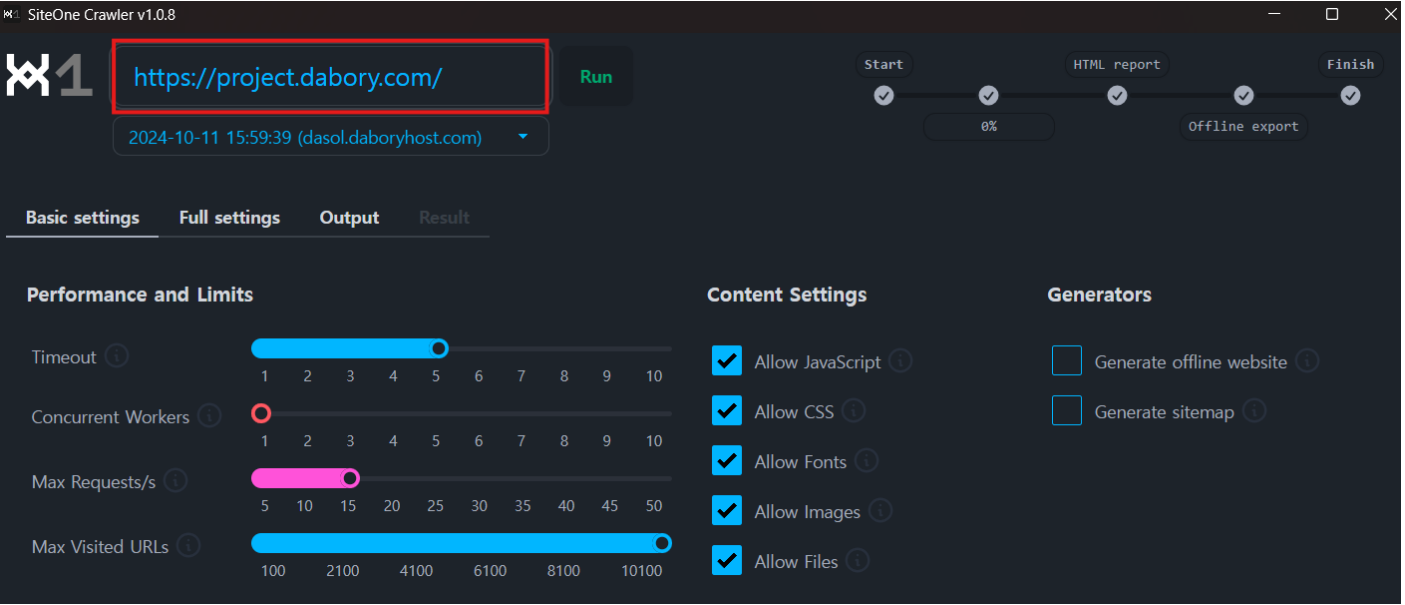

5. URL [] [] Run [] [].
6. [] [] [] 100% [] [] Online HTML report [] [].

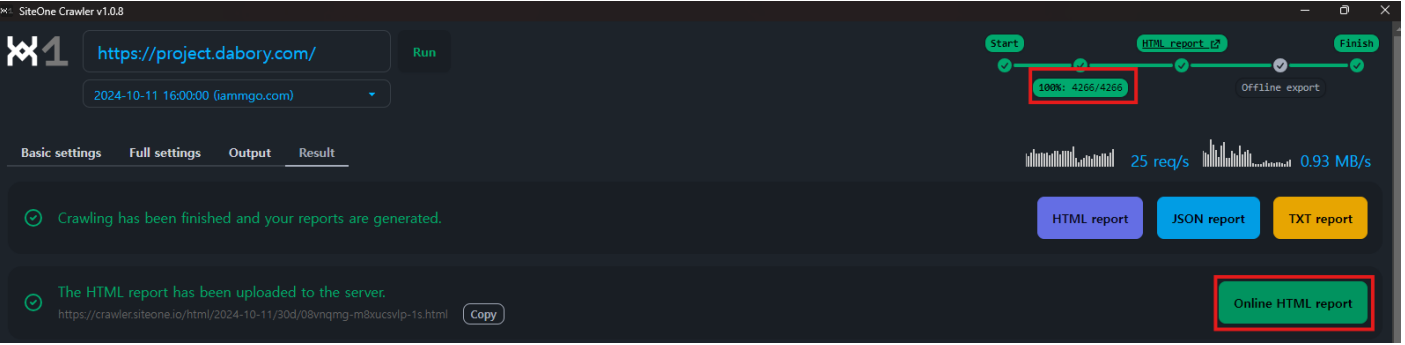

7. [] [] [] SEO and Open Graph [] [].

SEO metadata


Fulltext search

Found 713 row(s).

| URL | Indexing | Title | H1  | Description | Keywords |
|--------------------------------|----------|-------|--|-------------|----------|
| /ai-chatbot-solutions | Allowed | | Missing H1 | | |
| /ai-matching-solutions | Allowed | | Missing H1 | | |
| /bbs/list/elastic-functions | Allowed | | Missing H1 | | |
| /bbs/list/elastic-requirements | Allowed | | Missing H1 | | |
| /bbs/list/elastic-showcases | Allowed | | Missing H1 | | |
| /bbs/list/erp-functions | Allowed | | Missing H1 | | |
| /bbs/list/erp-requirements | Allowed | | Missing H1 | | |
| /bbs/list/pos-functions | Allowed | | Missing H1 | | |
| /bbs/list/pos-requirements | Allowed | | Missing H1 | | |
| /bbs/list/pos-showcases | Allowed | | Missing H1 | | |
| /bbs/list/shop-functions | Allowed | | Missing H1 | | |
| /bbs/list/sso-showcases | Allowed | | Missing H1 | | |
| /maint-matching | Allowed | | Missing H1 | | |
| /partner-addnew | Allowed | | Missing H1 | | |
| /partner-coexistence | Allowed | | Missing H1 | | |
| /partner-showcases | Allowed | | Missing H1 | | |
| /platform-showcases | Allowed | | Missing H1 | | |
| /bbs/list/asp-showcases | Allowed | | ASP 유지보수 사례 | | |
| /bbs/list/asp-showcases?page=1 | Allowed | | ASP 유지보수 사례 | | |

1. 1. 2. 3. 4. 5.

1. 1. 2. 3. 4. 5. Best practices 1. 2. 3. 4. 5.

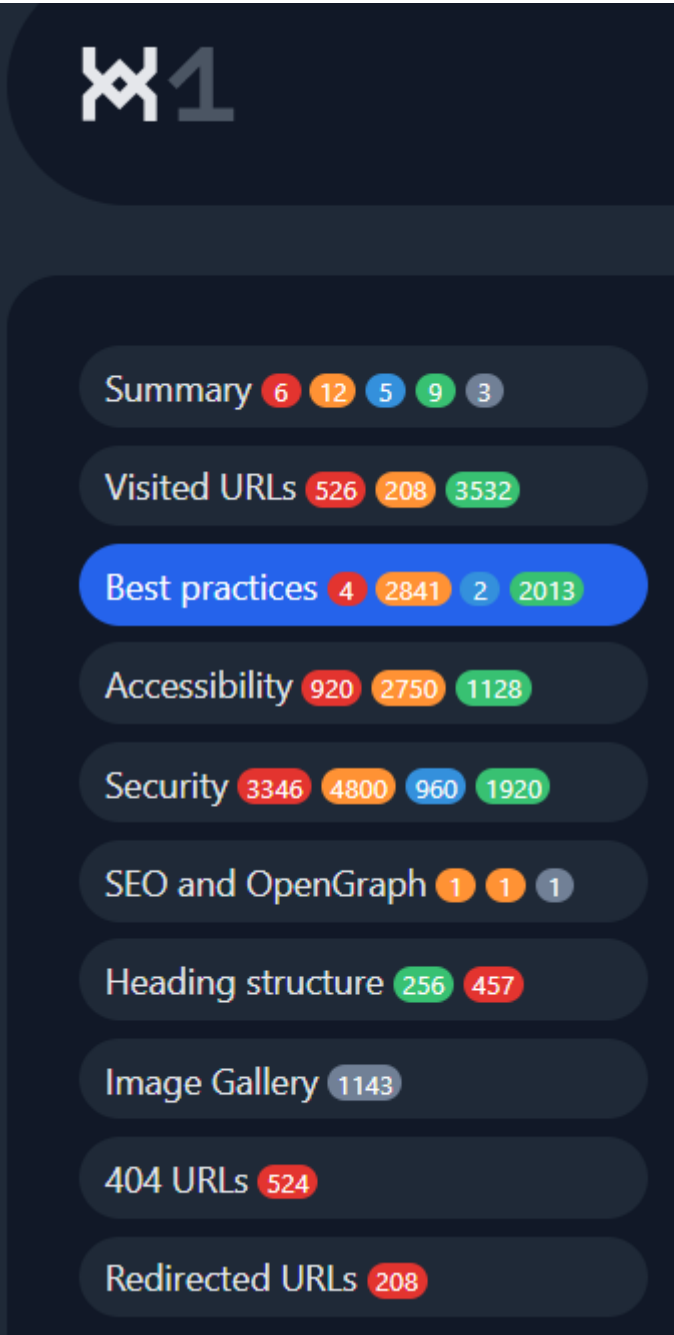

2. 1. 2. 3. 4. 5. url 1. 2. 3. 4. 5.

| Severity | Occurs | Detail | Affected URLs (max 5) |
|----------|--------|--|---|
| critical | 488 | No <h1> tag found in the HTML content. | URL 1 , URL 2 , URL 3 , URL 4 , URL 5 |
| critical | 5 | Multiple <h1> headings found. | URL 1 , URL 2 , URL 3 , URL 4 |
| warning | 451 | Heading structure is skipping levels: found an <h3> after an <h1>. | URL 1 , URL 2 , URL 3 , URL 4 , URL 5 |
| warning | 232 | Heading structure is skipping levels: found an <h4> after an <h1>. | URL 1 , URL 2 , URL 3 , URL 4 , URL 5 |
| warning | 14 | Heading structure is skipping levels: found an <h6> after an <h1>. | URL 1 , URL 2 , URL 3 , URL 4 , URL 5 |
| warning | 1 | Heading structure is skipping levels: found an <h5> after an <h1>. | /sso-solutions |

[Mac] Composer 安装 [教程]

* **mac** 系统 安装 教程。

1. Composer 与 PHP 版本 对应

Composer 与 PHP 版本 对应 关系, 可以参考 PHP 版本 对应 关系:

Homebrew 安装 教程:

Homebrew 安装 Composer, Homebrew 安装 Composer 与 PHP 版本 对应 关系。

安装 PHP(如: PHP 7.3) 与 brew install composer 安装 PHP(如: PHP 8.1) 与 PHP 版本 对应 关系:

PHP 7.3 安装 教程(PATH) 与 Homebrew 安装 Composer 与 PHP 版本 对应 关系。

2. 安装: PHP 7.3 与 Composer 安装

PHP 7.3 安装 Composer 与 PHP 版本 对应 关系:

2.1. Composer 安装 教程

Homebrew 安装 Composer 与 PHP 版本 对应 关系。

Composer 安装 教程:

```
bash
```

```
curl
```

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
```

Composer 安装 教程:

```
bash
```

```
curl
```

```
php composer-setup.php
```

安装 Composer 与: 安装 Composer 与 PHP 版本 对应 关系:

```
bash
```

```
curl
```

```
mv composer.phar /usr/local/bin/composer
```

安装 教程:

```
bash
```

```
curl
```

```
composer -v
```

2.2. Homebrew 安装 PHP 7.3 与 PHP

Homebrew 安装 Composer 与 PHP 7.3 版本 对应 关系。

PHP 7.3 PATH 設定:

```
bash
```

```
❯❯
```

```
export PATH="/usr/local/opt/php@7.3/bin:$PATH"
```

PHP 環境 構築 ① Composer 設定:

```
bash
```

```
❯❯
```

```
brew install composer
```

PHP 環境 構築:

```
bash
```

```
❯❯
```

```
php -v
```

Homebrew ① PHP 環境 構築 ①(❯❯):

```
bash
```

```
❯❯
```

```
brew uninstall php
```

3. PHP 環境 構築

❯❯ Composer 環境 ① PHP 環境 構築 ①(❯❯), ❯❯ PHP 7.3 ① ① ① ① ① ①:

PHP 環境 構築:

```
bash
```

```
❯❯
```

```
brew unlink php
```

PHP 7.3 ①:

```
bash
```

```
❯❯
```

```
brew link --overwrite php@7.3
```

PHP 環境 構築:

```
bash
```

```
❯❯
```

```
php -v
```

```
❯❯
```

Composer 環境 ① PHP 環境 構築 ①, Homebrew ① ① ① ① ① ① PHP ① ① ① ①.

❯❯ ① ① ① ① ① ① PHP 7.3 ① ① ① ① ① ① Composer ① ① ① ①.

PHP 環境 構築 ① ① brew unlink ① brew link ① ① ① ① ① ① ① ① ① ①.

2. PHP 7.3 ① ① ① ① Composer ①

2.1. Composer 安装与使用

Composer 安装与使用:

```
bash
```

```
cd ~
```

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
```

2.2. PHP 7.3 安装与使用

PHP 7.3 安装与使用:

```
bash
```

```
cd ~
```

```
/usr/local/opt/php@7.3/bin/php composer-setup.php
```

如果已经安装过 PHP 7.3，可以跳过这一步。PHP 7.3 安装与使用:

```
bash
```

```
cd ~
```

```
brew --prefix php@7.3
```

2.3. Composer 安装与使用

安装与使用 Composer:

```
bash
```

```
cd ~
```

```
sudo mv composer.phar /usr/local/bin/composer
```

2.4. 验证安装

PHP 7.3 安装与使用:

```
bash
```

```
cd ~
```

```
composer -v
```

3. Composer 与 PHP 7.3 安装与使用

PHP 7.3 安装与使用:

3.1. 安装与使用

~/.bash_profile 或 ~/.zshrc 中添加:

```
bash
```

```
cd ~
```

```
alias composer="/usr/local/opt/php@7.3/bin/php /usr/local/bin/composer"
```

保存并退出:

```
bash
```

```
cd ~
```

```
source ~/.zshrc
```

3.2. 验证安装

PHP 7.3 安装与使用:

```
bash
```

```
❏ ❏
```

```
composer -v
```

```
4. ❏ ❏
```

```
4.1. PHP ❏ ❏
```

```
❏ Composer❏ ❏❏ PHP ❏ ❏❏ ❏❏❏❏, composer ❏❏ ❏❏ ❏❏❏❏ ❏❏❏❏:
```

```
bash
```

```
which composer
```

```
4.2. PHP ❏ ❏
```

```
❏ ❏ PHP 7.3❏ ❏❏❏ ❏❏❏❏:
```

```
bash
```

```
brew unlink php
```

```
brew link --overwrite php@7.3
```