




- [\[Mac\] \[Win\] Composer \[Win\] \[Win\]](#) h1 [Win] [Win] [Win]
- [\[Mac\] \[Win\] Composer \[Win\] \[Win\]](#) h1 2 [Win] [Win] [Win]
- [\[Mac\] \[Win\] Composer \[Win\] \[Win\]](#) [Win] [Win]

SiteOne Crawler h1

1. [Download](#).
2. [Get MSI](#) [Get EXE](#) crawl [Get SNAP](#).

 **Choose how you want to use the tool**

Desktop Application - graphical interface with an already built-in command-line interface
Command-line Interface - for advanced users who prefer to work with the command line

Desktop Application Command-line Interface

1

Download the latest version of the installer from [releases](#), or here for most common platforms:

- Windows x64 - **MSI** (recommended) / [EXE](#) / [portable EXE](#)
- Linux x64 - [ApplImage](#) (recommended) / [DEB](#) / [SNAP](#)
- macOS arm64 (CPU M1/M2/M3) - [DMG*](#), macOS x64 (CPU Intel) - [DMG*](#)

*** Note for macOS users:** As of 12/12/2023, the macOS app is already signed and **officially notarized by Apple**. We will also strive to publish the next versions to the Mac App Store for easier installation and updates.

2

Install the application and **run** it. You will find it under the name `SiteOne Crawler`.

3

Enter the URL of the website you want to crawl and click the **Run** button.


4

Watch video below, which explains in more detail other useful options.

5


Report a bug or **suggest** an improvement via one of the [channels](#).

3. [Get EXE](#) [Get SNAP](#).
4. [Get MSI](#) [Get EXE](#) [Get SNAP](#) [URL](#) [Get SNAP](#).

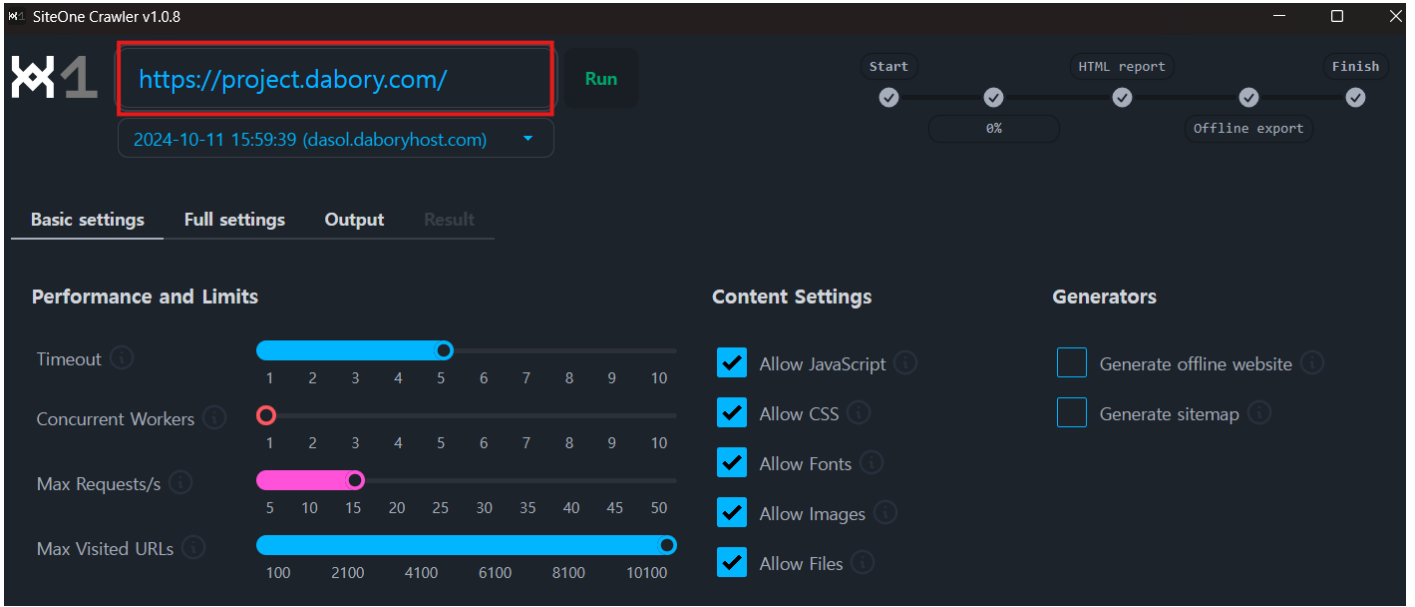

5. URL [] [] Run [] [].


6. [] [] [] 100% [] [] Online HTML report [] [].

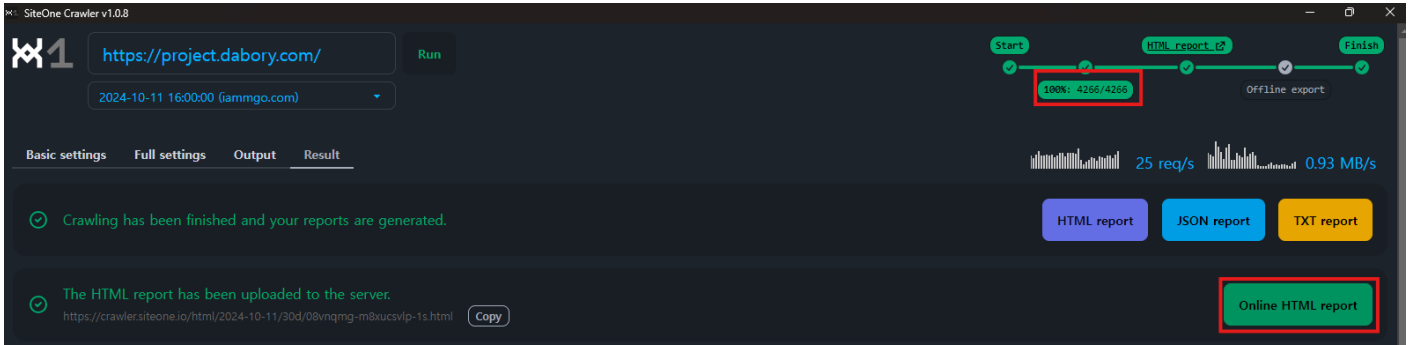

7. [] [] [] SEO and Open Graph [] [].


SEO metadata

Found 713 row(s).

URL	Indexing	Title	H1 	Description	Keywords
/ai-chatbot-solutions	Allowed		Missing H1		
/ai-matching-solutions	Allowed		Missing H1		
/bbs/list/elastic-functions	Allowed		Missing H1		
/bbs/list/elastic-requirements	Allowed		Missing H1		
/bbs/list/elastic-showcases	Allowed		Missing H1		
/bbs/list/erp-functions	Allowed		Missing H1		
/bbs/list/erp-requirements	Allowed		Missing H1		
/bbs/list/pos-functions	Allowed		Missing H1		
/bbs/list/pos-requirements	Allowed		Missing H1		
/bbs/list/pos-showcases	Allowed		Missing H1		
/bbs/list/shop-functions	Allowed		Missing H1		
/bbs/list/sso-showcases	Allowed		Missing H1		
/maint-matching	Allowed		Missing H1		
/partner-addnew	Allowed		Missing H1		
/partner-coexistence	Allowed		Missing H1		
/partner-showcases	Allowed		Missing H1		
/platform-showcases	Allowed		Missing H1		
/bbs/list/asp-showcases	Allowed		ASP 유지보수 사례		
/bbs/list/asp-showcases?page=1	Allowed		ASP 유지보수 사례		

1. 1. 2. 3. 4. 5.

1. 1. 2. 3. 4. 5. Best practices 1. 2. 3. 4. 5.

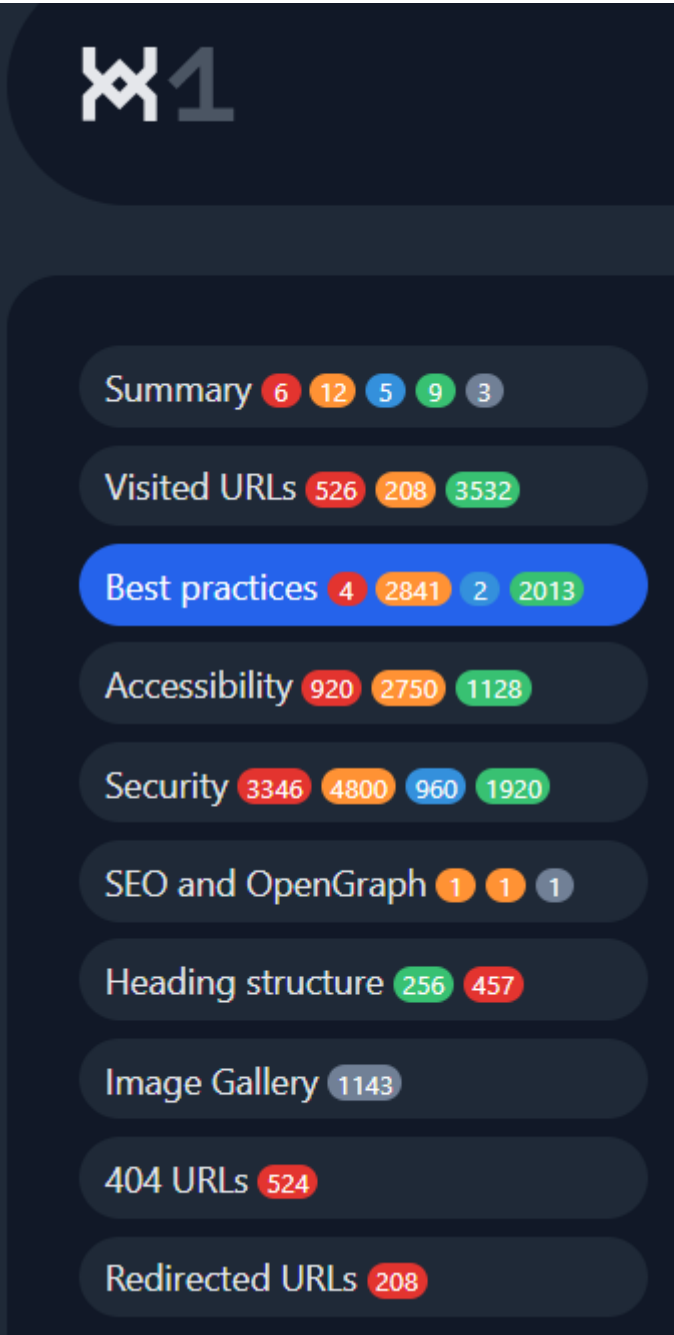

2. 1. 2. 3. 4. 5. url 1. 2. 3. 4. 5.

Severity	Occurs	Detail	Affected URLs (max 5)
critical	488	No <h1> tag found in the HTML content.	URL 1 , URL 2 , URL 3 , URL 4 , URL 5
critical	5	Multiple <h1> headings found.	URL 1 , URL 2 , URL 3 , URL 4
warning	451	Heading structure is skipping levels: found an <h3> after an <h1>.	URL 1 , URL 2 , URL 3 , URL 4 , URL 5
warning	232	Heading structure is skipping levels: found an <h4> after an <h1>.	URL 1 , URL 2 , URL 3 , URL 4 , URL 5
warning	14	Heading structure is skipping levels: found an <h6> after an <h1>.	URL 1 , URL 2 , URL 3 , URL 4 , URL 5
warning	1	Heading structure is skipping levels: found an <h5> after an <h1>.	/sso-solutions

[Mac] Composer 安装指南

* **mac** 系统安装指南。

1. Composer 与 PHP 版本匹配

Composer 与 PHP 版本匹配，安装 PHP 版本与 Composer 版本匹配：

Homebrew 安装 PHP 版本：

Homebrew 安装 Composer，Homebrew 安装 Composer 与 PHP 版本匹配。

安装 PHP (PHP 7.3) 版本，brew install composer 安装 PHP (PHP 8.1) 版本。

PHP 7.3 版本安装 Composer (PATH) 安装 Composer 与 PHP 版本匹配。

2. 安装 PHP 7.3 版本 Composer

PHP 7.3 版本 Composer 安装指南：

2.1. Composer 安装

Homebrew 安装 Composer 与 PHP 版本匹配。

Composer 安装指南：

```
bash
```

```
curl
```

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
```

Composer 安装：

```
bash
```

```
curl
```

```
php composer-setup.php
```

安装 Composer 与 PHP 版本匹配。

```
bash
```

```
curl
```

```
mv composer.phar /usr/local/bin/composer
```

安装：

```
bash
```

```
curl
```

```
composer -v
```

2.2. Homebrew 安装 PHP 7.3 版本

Homebrew 安装 Composer 与 PHP 7.3 版本匹配。

PHP 7.3 PATH 設定:

```
bash
```

```
❯❯
```

```
export PATH="/usr/local/opt/php@7.3/bin:$PATH"
```

PHP 設定 完了 Composer 完了:

```
bash
```

```
❯❯
```

```
brew install composer
```

PHP 設定 完了:

```
bash
```

```
❯❯
```

```
php -v
```

Homebrew 経由で PHP 7.3 をインストール (完了):

```
bash
```

```
❯❯
```

```
brew uninstall php
```

3. PHP 7.3 をインストール

Composer を使って PHP 7.3 をインストール, PHP 7.3 をインストール:

PHP 7.3 をインストール:

```
bash
```

```
❯❯
```

```
brew unlink php
```

PHP 7.3 をインストール:

```
bash
```

```
❯❯
```

```
brew link --overwrite php@7.3
```

PHP 7.3 をインストール:

```
bash
```

```
❯❯
```

```
php -v
```

```
❯❯
```

Composer を使って PHP 7.3 をインストール, Homebrew 経由で PHP 7.3 をインストール (完了):

PHP 7.3 をインストール (完了) PHP 7.3 をインストール Composer をインストール (完了):

PHP 7.3 をインストール (完了) brew unlink brew link 経由で PHP 7.3 をインストール (完了):

2. PHP 7.3 をインストール Composer をインストール

2.1. Composer 安装与使用

Composer 安装与使用:

```
bash
```

```
cd ~
```

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
```

2.2. PHP 7.3 安装与使用

PHP 7.3 安装与使用:

```
bash
```

```
cd ~
```

```
/usr/local/opt/php@7.3/bin/php composer-setup.php
```

如果已经安装过 PHP 7.3，可以跳过这一步。PHP 7.3 安装与使用:

```
bash
```

```
cd ~
```

```
brew --prefix php@7.3
```

2.3. Composer 安装与使用

安装与使用 Composer:

```
bash
```

```
cd ~
```

```
sudo mv composer.phar /usr/local/bin/composer
```

2.4. 验证安装

PHP 7.3 安装与使用:

```
bash
```

```
cd ~
```

```
composer -v
```

3. Composer 与 PHP 7.3 安装与使用

PHP 7.3 安装与使用:

3.1. 安装与使用

~/.bash_profile 或 ~/.zshrc 中添加:

```
bash
```

```
cd ~
```

```
alias composer="/usr/local/opt/php@7.3/bin/php /usr/local/bin/composer"
```

保存并退出:

```
bash
```

```
cd ~
```

```
source ~/.zshrc
```

3.2. 验证安装

PHP 7.3 安装与使用:

bash

❏ ❏

composer -v

4. ❏ ❏

4.1. PHP ❏ ❏

❏ Composer❏ ❏❏ PHP ❏ ❏❏ ❏❏❏❏, composer ❏❏ ❏❏ ❏❏❏❏ ❏❏❏❏:

bash

which composer

4.2. PHP ❏ ❏

❏❏ PHP 7.3❏ ❏❏❏ ❏❏❏❏:

bash

brew unlink php

brew link --overwrite php@7.3